

# HTD® Mustang S - Zahnriemen


# Profil 8M

## Standardriemenlängen

Standardbreiten	
20 - 30 - 50 - 85 mm	

Zähnezahl Z	Länge (mm)
36	288
38	304
44	352
47	376
52	416
53	424
59	472
60	480
70	560
75	600
78	624
80	640
82	656
90	720
97	776
98	784
100	800
110	880
114	912
115	920
120	960
130	1040
140	1120
150	1200
160	1280
163	1304
166	1328
170	1360
178	1424
180	1440
200	1600
220	1760
225	1800
250	2000
281	2248
300	2400
350	2800
376	3008
426	3408
476	3808


## Zahnform HTD

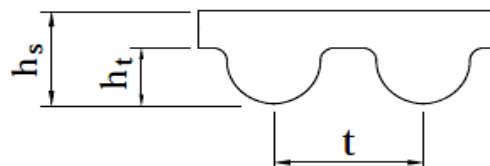

## Hauptabmessungen

Profil	Teilung t [mm]	Zahnhöhe ht [mm]	Gesamtdicke hs [mm]
3M	3	1,2	2,4
5M	5	2,1	3,6
8M	8	3,4	5,6
14M	14	6,1	10,0

## Riemenaufbau

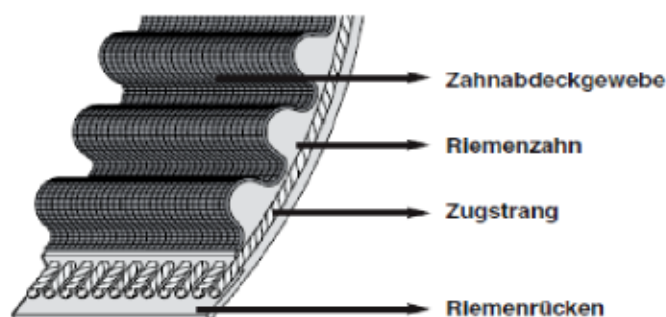

Komponente	HTD	Mustang S	Mustang T
Riemenrücken	CR	CR	NBR
Zugstrang	Glascord	Glascord S	Aramidcord
Riemenzahn	CR	CR	NBR
Zahnabdeckgewebe	Polyamid	Polyamid xS	Polyamid xT

**Mustang Speed - für hohe Riemengeschwindigkeiten**