





## PBT Keilriemenscheiben für Taper Spannbuchse / Abmessungen


SPB	Anzahl der Rillen	Taper-Buchse		Ausfg.	H	L	Z	U	Gewicht ohne Buchse kg
		Typ	Bohrung min ÷ max Ø mm						
90	1	1210	15 - 50	1	-	25	-	-	0,75
	2	1210	15 - 50	10	-	25	19	47	1,15
	3	1210	15 - 50	10	-	25	28	47	1,55
100	1	1610	12 - 42	2	-	25	-	-	0,91
	2	1610	12 - 42	10	-	25	19	60	1,25
	3	1610	12 - 42	10	-	25	28	57	1,95
112	1	1610	12 - 42	2	-	25	-	-	1,15
	2	1610	12 - 42	10	-	25	19	69	1,68
	3	1610	12 - 42	10	-	25	28	69	2,25
118	1	1610	12 - 42	2	-	25	-	-	1,45
	2	1610	12 - 42	10	-	25	19	76	2,00
	3	1610	12 - 42	10	-	25	28	76	2,60
125	1	1610	12 - 42	2	-	25	-	-	1,70
	2	2012	15 - 50	2	-	32	12	86	2,10
	3	2012	15 - 50	2	-	32	31	86	2,44
	4	2012	15 - 50	11	-	32	50/25	86	2,94
132	1	1610	12 - 42	2	-	25	-	-	2,10
	2	2012	15 - 50	2	-	32	12	89	2,37
	3	2012	15 - 50	2	-	32	31	89	3,08
	4	2012	15 - 50	11	-	32	50/25	89	3,90
140	1	1610	12 - 42	1	-	25	-	-	2,06
	2	2012	15 - 50	2	-	31	13	100	2,70
	3	2012	15 - 50	2	-	31	32	100	3,40
	4	2517	18 - 65	11	-	46	18	100	3,80
	5	2517	18 - 65	11	-	46	27,5	100	4,50
	6	2517	18 - 65	11	-	46	37	100	5,40
150	1	1610	12 - 42	1	-	25	-	-	2,45
	2	2012	15 - 50	2	-	31	13	110	3,30
	3	2517	18 - 65	2	-	46	17	110	4,01
	4	2517	18 - 65	11	-	46	18	110	4,86
	5	2517	18 - 65	11	-	46	27,5	110	5,50
	6	2517	18 - 65	11	-	46	37	110	6,24
160	1	1610	12 - 42	1	-	25	-	-	2,87
	2	2012	15 - 50	2	-	31	13	120	3,86
	3	2517	18 - 65	2	-	46	17	120	4,96
	4	2517	18 - 65	11	-	46	18	120	5,72
	5	2517	18 - 65	11	-	46	27,5	120	6,39
	6	3020	25 - 75	11	-	51	34,5	120	7,22
	8	3020	25 - 75	11	-	51	53,5	120	7,92
	170	1	1610	12 - 42	1	-	25	-	-
2		2012	15 - 50	2	-	31	13	130	4,46
3		2517	18 - 65	2	-	46	17	130	5,76
4		2517	18 - 65	11	-	46	18	130	6,80
5		3020	25 - 75	11	-	51	25	130	6,60
6		3020	25 - 75	11	-	51	34,5	130	7,64
8		3020	25 - 75	11	-	51	53,5	130	9,18
180		1	1610	12 - 42	1	-	25	-	-
	2	2517	18 - 65	4	120	46	2	180	4,86
	3	2517	18 - 65	5	120	46	17	180	5,86
	4	2517	18 - 65	6	120	46	18	180	7,66
	5	3020	25 - 75	11	-	51	25	180	7,80
	6	3020	25 - 75	11	-	51	34,5	180	8,52
	8	3020	25 - 75	11	-	51	53,5	180	9,94
	190	1	2012	15 - 50	4	112	32	7	-
2		2517	18 - 65	4	120	46	2	190	4,92
3		2517	18 - 65	5	120	46	17	190	5,96
4		2517	18 - 65	6	120	46	18	190	8,68
5		3020	25 - 75	11	-	51	25	190	9,00
6		3020	25 - 75	11	-	51	34,5	190	9,80
8		3020	25 - 75	11	-	51	53,5	190	13,50
200		1	2012	15 - 50	4	112	32	7	-
	2	2517	18 - 65	4	120	46	2	160	5,30
	3	2517	18 - 65	5	120	46	17	160	6,35
	4	3020	25 - 75	6	146	51	25,5	160	9,45
	5	3020	25 - 75	6	146	51	25	160	10,52
	6	3020	25 - 75	6	146	51	34,5	160	11,00
	8	3535	45 - 90	11	-	91	33,5	160	15,28




1




2




4




5



6



10




11




### PBT Keilriemenscheiben für Taper Spannbuchse / Abmessungen


SPB dw Ø mm	Anzahl der Rillen	Taper-Buchse		Ausfg.	H Ø mm	L mm	Z mm	U Ø mm	Gewicht ohne Buchse kg
		Typ	Bohrung min ÷ max Ø mm						
212	2	2517	18 - 65	4	120	46	2	172	5,84
	3	2517	18 - 65	5	120	46	17	172	6,90
	4	3020	25 - 75	6	146	51	15,5	172	9,56
	5	3020	25 - 75	6	146	51	25	172	10,52
	6	3535	45 - 90	11	-	91	14,5	172	15,55
	8	3535	45 - 90	11	-	91	33,5	172	17,90
224	2	2517	18 - 65	4	120	46	2	184	5,94
	3	2517	18 - 65	5	120	46	17	184	7,38
	4	3020	25 - 75	6	146	51	15,5	184	9,56
	5	3020	25 - 75	6	146	51	25	184	12,38
	6	3535	45 - 90	11	-	91	14,5	184	17,00
	8	3535	45 - 90	11	-	91	33,5	184	20,62
236	2	2517	18 - 65	4	120	46	2	196	6,90
	3	2517	18 - 65	6	120	46	8,5	196	7,81
	4	3020	25 - 75	6	146	51	15,5	196	10,00
	5	3535	45 - 90	11	178	91	5	196	19,30
	6	3535	45 - 90	11	178	91	14,5	196	20,12
	8	3535	45 - 90	11	178	91	33,5	196	23,82
250	2	2517	18 - 65	4	120	46	2	210	6,90
	3	3020	25 - 75	5	146	51	12	210	9,04
	4	3020	25 - 75	6	146	51	15,5	210	11,10
	5	3535	45 - 90	6	178	91	5	210	19,63
	6	3535	45 - 90	6	178	91	14,5	210	21,00
	8	3535	45 - 90	6	178	91	33,5	210	24,62
280	2	2517	18 - 65	4	120	46	2	240	8,46
	3	3020	25 - 75	6	146	51	6	240	11,00
	4	3020	25 - 75	6	146	51	15,5	240	12,76
	5	3535	45 - 90	6	178	91	5	240	19,63
	6	3535	45 - 90	6	178	91	14,5	240	22,12
	8	3535	45 - 90	6	178	91	33,5	240	24,86
300	2	2517	18 - 65	4	120	46	2	260	9,19
	3	3020	25 - 75	5	146	51	12	260	14,94
	4	3535	45 - 90	4	178	91	9	260	21,16
	5	3535	45 - 90	5	178	91	10	260	24,10
	6	3535	45 - 90	5	178	91	29	260	27,44
	8	3535	45 - 90	6	178	91	33,5	260	25,24
315	2	2517	18 - 65	12	120	46	2	275	9,76
	3	3020	25 - 75	6	146	51	6	275	12,34
	4	3535	45 - 90	4	178	91	9	275	19,82
	5	3535	45 - 90	5	178	91	10	275	21,52
	6	3535	45 - 90	6	178	91	14,5	275	24,60
	8	3535	45 - 90	6	178	91	33,5	275	28,52
355	2	3020	25 - 75	3	146	51	3,5	315	10,37
	3	3020	25 - 75	9	146	51	6	315	13,10
	4	3535	45 - 90	7	178	91	9	315	20,48
	5	3535	45 - 90	8	178	91	10	315	24,20
	6	3535	45 - 90	8	178	91	29	315	27,00
	8	3535	45 - 90	9	178	91	33,5	315	32,02
400	2	3020	25 - 75	3	146	51	35	360	11,50
	3	3535	45 - 90	7	178	91	28	360	19,64
	4	3535	45 - 90	7	178	91	9	360	22,24
	5	3535	45 - 90	8	178	91	10	360	25,61
	6	3535	45 - 90	8	178	91	29	360	28,30
	8	4040	55 - 100	9	267	101	28,5	360	34,70
450	2	3020	25 - 75	7	146	51	7	410	14,50
	3	3535	45 - 90	7	178	91	28	410	22,94
	4	3535	45 - 90	7	178	91	9	410	25,70
	5	3535	45 - 90	8	178	91	10	410	29,00
	6	4040	55 - 100	8	215	101	9	410	37,80
	8	4040	55 - 100	9	215	101	28,5	410	41,35
500	2	3020	25 - 75	3	146	51	3,5	460	16,28
	3	3535	45 - 90	7	178	91	28	460	24,00
	4	3535	45 - 90	7	178	91	9	460	29,00
	5	3535	45 - 90	8	178	91	10	460	33,80
	6	4040	55 - 100	8	215	101	19	460	41,50
	8	4040	55 - 100	9	215	101	28,5	460	48,00




3




4




5




6




7




8



9



11




12




## PBT Keilriemenscheiben für Taper Spannbuchse / Abmessungen

SPB dw Ø mm	Anzahl der Rillen	Taper-Buchse		Ausfg.	H Ø mm	L mm	Z mm	U Ø mm	Gewicht ohne Buchse kg
		Typ	Bohrung min ÷ max Ø mm						
560	2	3020	25 - 75	7	146	51	7	520	24,72
	3	3535	45 - 90	7	178	91	28	520	33,70
	4	3535	45 - 90	7	178	91	9	520	40,62
	5	3535	45 - 90	8	178	91	10	520	48,50
	6	4040	55 - 100	8	215	101	19	520	57,00
	8	4040	55 - 100	9	215	101	28,5	520	71,20
630	2	3535	45 - 90	7	178	91	47	590	27,00
	3	3535	45 - 90	7	178	91	28	590	33,04
	4	3535	45 - 90	7	178	91	9	590	41,50
	5	4040	55 - 100	8	215	101	-	590	53,00
	6	4040	55 - 100	8	215	101	19	590	62,00
	8	5050	70 - 125	9	267	126	16	590	90,00
710	2	3535	45 - 90	7	178	91	47	670	32,00
	3	3535	45 - 90	7	178	91	28	670	39,20
	4	3535	45 - 90	7	178	91	9	670	57,00
	5	4040	55 - 100	8	215	101	-	670	62,00
	6	4040	55 - 100	8	215	101	19	670	63,00
	8	5050	70 - 125	9	267	126	16	670	91,00
800	2	3535	45 - 90	7	178	91	47	760	50,50
	3	3535	45 - 90	7	178	91	28	760	47,00
	4	4040	55 - 100	7	215	101	19	760	68,00
	5	4040	55 - 100	8	215	101	-	760	75,50
	6	4040	55 - 100	8	215	101	19	760	93,00
	8	5050	70 - 125	9	267	126	16	760	98,00
900	3	3535	45 - 90	7	178	91	28	860	79,00
	4	4040	55 - 100	7	215	101	19	860	83,00
	5	4040	55 - 100	8	215	101	-	860	85,00
1000	3	4040	55 - 100	7	215	101	38	958	80,00
	4	4040	55 - 100	7	215	101	19	958	83,00
	5	4040	55 - 100	8	215	101	-	958	88,00
1250	3	4040	55 - 100	7	215	101	38	1208	108,00
	4	4040	55 - 100	7	215	101	19	1208	117,00
	5	4040	55 - 100	8	215	101	-	1208	132,00

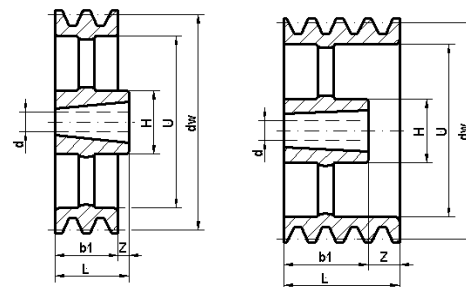

7

8



9