
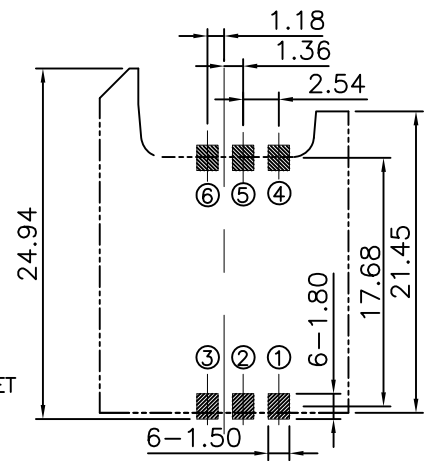
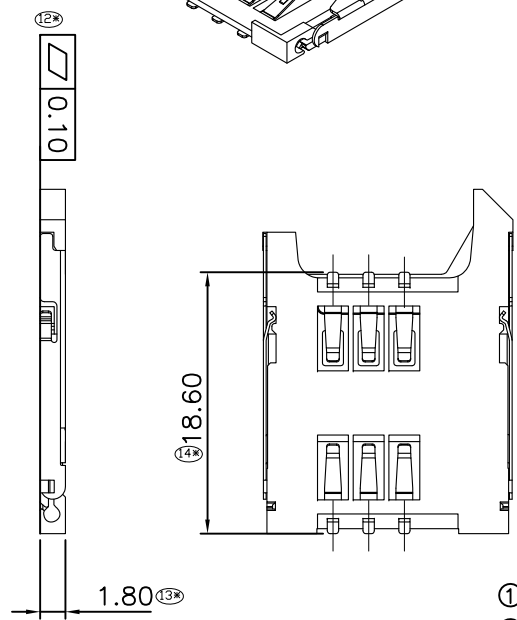
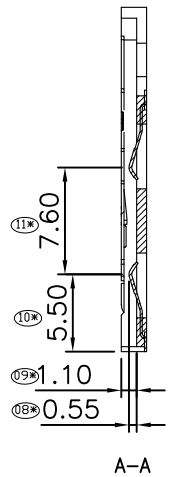
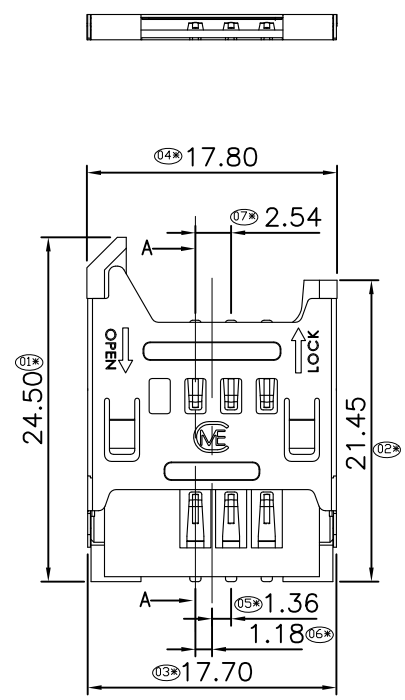


| | | | | |
|-----|-------------|-----------------|-------|--------|
| ③ | SHELL | STAINLESS STEEL | | |
| ② | CONTACT | COPPER ALLOY | GOLD | |
| ① | HOUSING | HI/TEMP | BLACK | |
| NO. | DESCRIPTION | MATERIAL | COLOR | REMARK |

MATERIALS
 1.HOUSING:HI-TEMP.(UL 94V-0).BLACK.
 2.TERMINAL:COPPER ALLOY(T=0.15mm).GOLD PLATED OVER NICKEL.
 3.COVER:STAINLESS STEEL(T=0.2mm)
 SPECIFICATION
 1.CURRENT RATING:1.0 A. MAX
 2.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.
 3.INSULATION RESISTANCE:1000MΩMIN. AT 500V DC.
 4.CONTACT RESISTANCE: 30mΩMAX
 5.OPERATING TEMPERATURE: -40°C TO +85°C

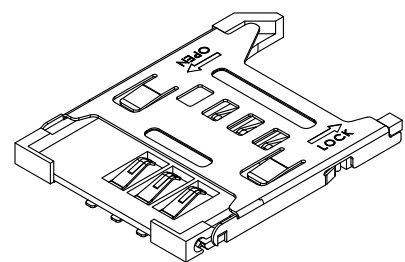

- ① VCC
- ② RESET
- ③ CLK
- ④ GND
- ⑤ VPP
- ⑥ I/O

RECOMMEND P.C.B LAYOUT
 TOLERANCE ± 0.05
 TOP VIEW

| | |
|----------------|---|
| Product Number | Description |
| 115G-AAAA-R | SIM Card Socket 6Pin Hinge Type H=1.8mm ,Gold Flash Plating,Without Peg |

| | | |
|--------------------------------------|----------|------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCE | | |
| ANGLES | ANG. | ±5° |
| LINEAR | 0. | ±0.3 |
| | 0.0 | ±0.25 |
| | 0.00 | ±0.20 |
| SCALE | AS SHOWN | UNIT: mm |
| DRAWN | Willis | 2012/08/03 |
| CHECKED | Angel | 2012/08/03 |
| APPROVED | Ken | 2012/08/03 |



www.attend.com.tw
 DRAWN NAME:
 SIM Card Socket Hinge Type H:1.8mm
 PRODUCT NO. 115G-AAAA-R

| | | | | | |
|------|-------------|------|------|-------------|------|
| REV. | DESCRIPTION | DATE | REV. | DESCRIPTION | DATE |
| 1 | | | 4 | | |
| 2 | | | 5 | | |
| 3 | | | 6 | | |
| 4 | | | 7 | | |