

### SPECIFICATION:

Current rating: 1.5 A  
 Insulation resistance: 500 MΩ min.  
 Contact resistance: 30 mΩ max.  
 Dielectric voltage: 1000 V AC  
 Operation temperature: -40 °C to +70 °C



### MATERIAL:

Housing: PBT UL94V-0  
 Contacts: Phosphorbronze  
 Solder pins: Phosphorbronze

### FINISH:


Contacts: Gold over nickel  
 Solder pins: Tin over nickel

### HANDLING:


Processing: Wave soldering  
 Packing: Tray

### TOLERANCE:




.X ± 0.25  
 .XX ± 0,20



MJUSExxxxx

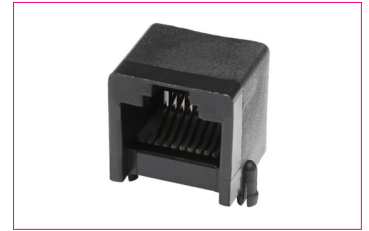

MJUSNxxxxx

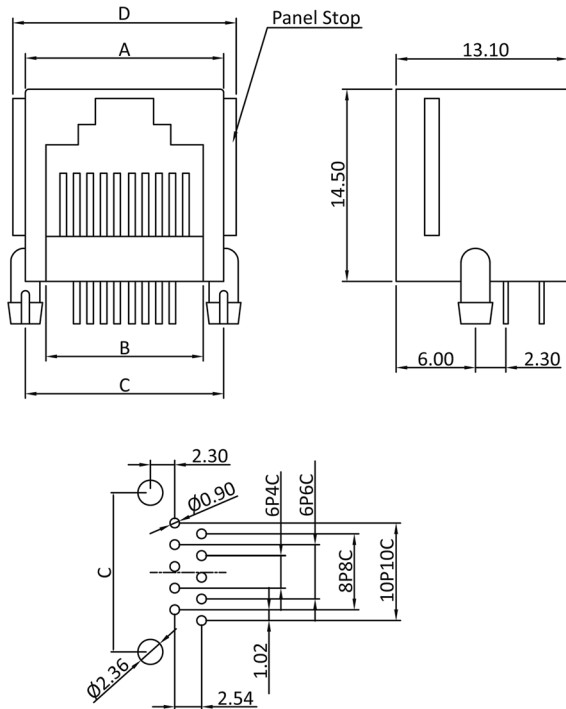

### Dimensions

Positions:	A	B	C	D
4	10,0	7,85	10,0	12,0
6	12,2	9,90	12,0	14,2
8	15,0	11,85	15,0	16,9
10	15,0	11,85	15,0	16,9

### Order-Information

Identifier:	Flange:	Positions:	Conductors:	Contact Plating:	Colour:	Version:
MJUS	#	#	#	#	#	#
Modular Jack unshielded, PCB mount	N: without ear E: with ear	4: 4P 6: 6P 8: 8P 10: 10P	4: 4C 2: 2C 6: 6C 8: 8C 10: 10C	GA: 6 μ" Gold * G: 3 μ" Gold	B: black * Y: grey	empty: without keyway * K: with keyway (8P, 10P only) D: Offset latch (6P only)

\* = standard