


Stecker

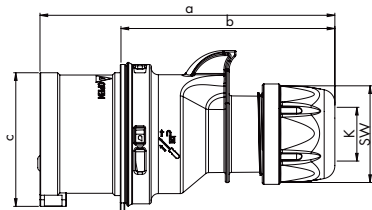


„Shark“ Stecker

	16 Amp			32 Amp		
Pole	3	4	5	3	4	5
a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K_Kabel Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Anschlussart:	Schraubklemmen					
Leitung flexibel [mm²]	1-2,5			2,5-6		
Kontaktschrauben [Ncm]	100 Ncm			110 Ncm		
SW	42	42	42	50	50	50
Gewicht [g]	112	131	154	184	204	236

- mit Schraubklemmen
- Gehäusematerial: PA6
- Kontakte: Messing
 - für vernickelte Kontaktausführung fügen Sie ein „v“ an, z.B.: 015-6

IP44 spritzwassergeschützt

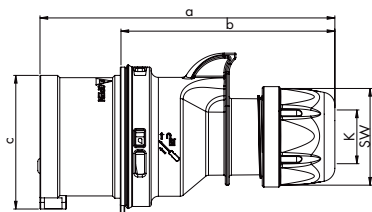

„Turbo Shark“ Stecker

	16 Amp			32 Amp		
Pole	3	4	5	3	4	5
a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K_Kabel Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Anschlussart:	Schraublose Klemme					
Leitung flexibel [mm²]	1-2,5			2,5-6		
SW	42	42	42	50	50	50
Gewicht [g]	114	135	159	189	209	244

- schraublose Anschluss technik
- Gehäusematerial: PA6
- Kontakte: Messing
 - für vernickelte Kontaktausführung fügen Sie ein „v“ an, z.B.: 015-6TTv


IP44 spritzwassergeschützt

Ampere	Pole	VPE	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Best.Nr.	Best.Nr.	Best.Nr.	Best.Nr.	Best.Nr.	Best.Nr.
16	3	10	013-4	013-6	013-9	013-7	013-10	013-2
16	4	10	014-4	014-9	014-6	014-7	014-10	014-2
16	5	10	015-4	015-9	015-6	015-7	015-10	015-2
32	3	10	023-4	023-6	023-9	023-7	023-10	023-2
32	4	10	024-4	024-9	024-6	024-7	024-10	024-2
32	5	10	025-4	025-9	025-6	025-7	025-10	025-2



015-6

16	3	10	013-4TT	013-6TT	013-9TT			
16	4	10	014-4TT	014-9TT	014-6TT			
16	5	10	015-4TT	015-9TT	015-6TT			
32	3	10	023-4TT	023-6TT	023-9TT			
32	4	10	024-4TT	024-9TT	024-6TT			
32	5	10	025-4TT	025-9TT	025-6TT			



015-6TT