
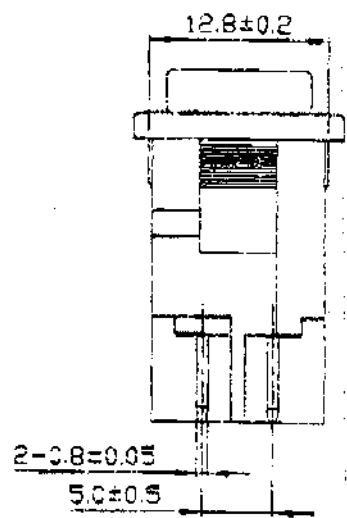
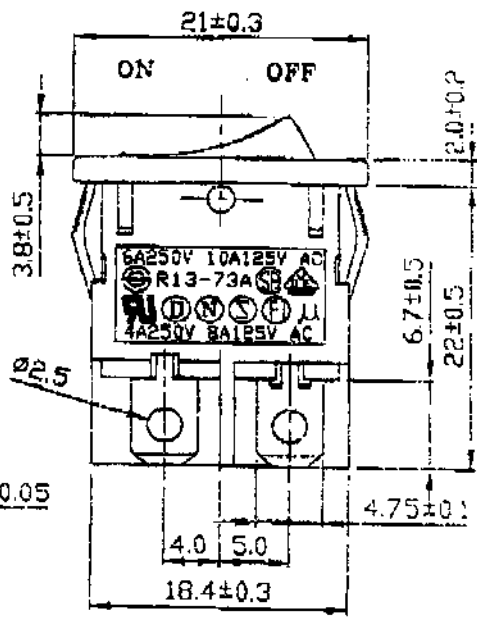
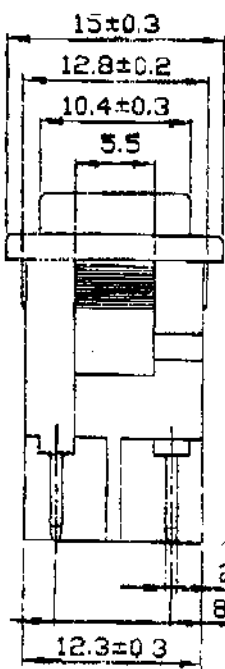
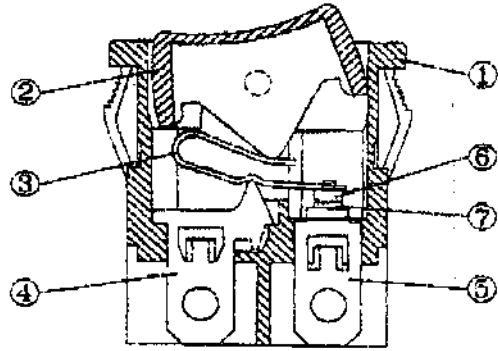


Rating	UL, CSA 8A 125V, 4A 250V AC VDE 10A 125V, 6A 250V AC	Mount Hole	Circuit Structure	
Contact R	50m ohm Max.			
Insulation R	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute	Thickness		
Circuit	4P DPST ON-OFF	X	Y	
		0.75 ± 0.02	19.2 ± 0.1	13 ± 0.1
		1.25 ± 0.02	19.4 ± 0.1	13 ± 0.1
		2.5	19.8 ± 0.1	13 ± 0.1

CEI B/N: 700896



Spec-No.	R13-73A	SQ	No.	Note	Date	Name
Date						
Drawing	Check	Approval				
王何山						
Aug-28-92						