

Connector - SACC-M12FS-5CON-DM 5-8 SH VA - 1440041

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Connector, 5-position, shielded, Socket straight M12, A-coded, Screw connection, Knurl material: Stainless steel, Cable gland M16, External cable diameter 5.5 mm ... 8.6 mm

Your advantages

- Safe use in the field, thanks to a high degree of protection
- Flexible: connectors for on-site assembly
- Screw connection: proven connection technology for a large selection of different conductors
- Reliable signal transmission - 360° shielding in environments with electromagnetic interference

Key commercial data

package_quantity	1
GTIN	4046356481373

Technical data

Dimensions

External cable diameter	5.5 mm ... 8.6 mm
Stripping length of the sheath	35 mm
Stripping length of the individual wire	5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP65
Degree of protection	IP66
Degree of protection	IP67
Degree of protection	IP69K

General

Rated current at 40°C	4 A
Rated voltage	60 V DC
Rated voltage	48 V AC
Number of positions	5
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
Status display	No
Overvoltage category	II

Connector - SACC-M12FS-5CON-DM 5-8 SH VA - 1440041

Technical data

General

Degree of pollution	3
Connection method	Screw connection
Conductor cross section	0.25 mm ² ... 0.75 mm ²
Conductor cross section AWG	24 ... 18
Insertion/withdrawal cycles	≥ 100
Torque	0.4 Nm (M12 knurl)
Torque	0.2 Nm (Screw terminal blocks)
Torque	0.8 Nm ... 1 Nm (Pressure nut with sleeve housing with 4 mm ... 8 mm external cable diameter)
Torque	1 Nm ... 1.4 Nm (Pressure nut with sleeve housing with 8 mm ... 12 mm external cable diameter)
Tightening torque	Screw plug insert with sleeve housing as far it will go
Assembly instructions	The wires can be connected both with ferrules and without ferrules

Material

Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA
Material of grip body	Stainless steel
Material, knurls	Stainless steel
Sealing material	FKM

Cable

Standards/specifications	M12 connector IEC 61076-2-101
--------------------------	-------------------------------

Standards and Regulations

Standard designation	M12 connector
Standards/regulations	IEC 61076-2-101
Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27440104
eCl@ss 9.0	27440102

ETIM

Connector - SACC-M12FS-5CON-DM 5-8 SH VA - 1440041

Classifications

ETIM

ETIM 3.0	EC002061
ETIM 4.0	EC002062
ETIM 5.0	EC002062

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

GL / UL Recognized / cUL Recognized / EAC / EAC /

Approval details

GL s

UL Recognized s


cUL Recognized s

EAC s

s

Drawings


Dimensional drawing

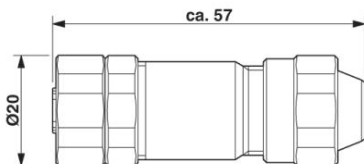

M12 x 1 socket, straight, shielded

Connector - SACC-M12FS-5CON-DM 5-8 SH VA - 1440041

Schematic diagram

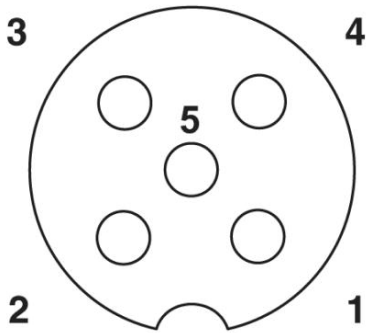

Pin assignment M12 socket, 5-pos., A-coded, socket side view

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>